

### DS-2CE16C2T-IR


#### HD720P IR Bullet Camera



#### Key features

- HD720P Video Output
- Adopt HDTVl Technology
- True Day/Night
- DNR, Smart IR
- 20m IR distance
- IP66 weatherproof

#### Dimensions

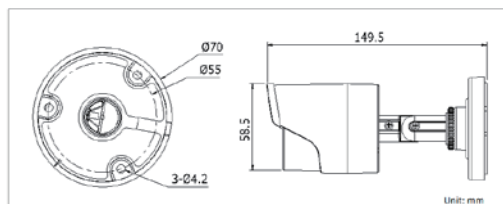

#### Accessories



Video balun  
DS-1H18

#### Available models

DS-2CE16C2T-IR

DS-2CE16C2T-IR	
Camera	
Image Sensor	1 MP CMOS Image Sensor
Effective Pixels	1280(H)*720(V)
Min. Illumination	0.01 Lux @(F1.2,AGC ON), 0 Lux with IR
Shutter Time	1/25(1/30) s to 1/50,000 s
Lens	3.6mm (2.8mm, 6mm optional)
	Angle of View: 78°(3.6mm), 97.3°(2.8mm), 51.2°(6mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	720p @ 50fps/720p @ 60fps
HD Video Output	1 Analog HD output
CVBS Output	1Vp-p Composite Output(75Ω/BNC)
S/N Ratio	More than 52dB
General	
Working Temperature/ Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC
Power Consumption	Max. 4W
Weather Proof Ratings	IP66
IR Range	Up to 20m
Dimensions	Φ 70×149.5 mm (Φ 2.76" ×5.89")
Weight	360 g (0.79 lb)