


DS-2CE16C2T-IRP

HD720P IR Bullet Camera


TURBO HD

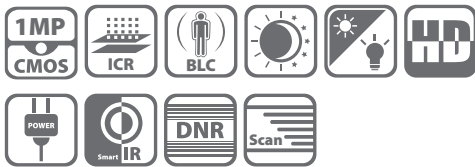

Key features

- HD720P Video Output
- Adopt HDTV Technology
- True Day/Night
- DNR, Smart IR
- 20m IR distance

Dimensions

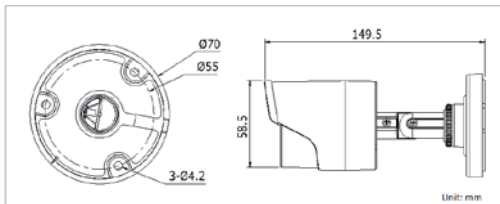

Accessories



Video balun
DS-1H18

Available models

DS-2CE16C2T-IRP

DS-2CE16C2T-IRP	
Camera	
Image Sensor	1 MP CMOS Image Sensor
Effective Pixels	1280(H)*720(V)
Min. Illumination	0.01 Lux @(F1.2,AGC ON), 0 Lux with IR
Shutter Time	1/25(1/30) s to 1/50,000 s
Lens	3.6mm (2.8mm, 6mm optional)
	Angle of View: 78°(3.6mm), 97.3°(2.8mm), 51.2°(6mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	25 fps (PAL) / 30 fps (NTSC)
HD Video Output	1 Analog HD output
S/N Ratio	More than 52dB
General	
Working Temperature/ Humidity	-20 °C - 45 °C (-4 °F - 113 °F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC
Power Consumption	Max. 2.5W
IR Range	Up to 20m
Dimensions	Φ 70×149.5 mm (Φ 2.76" ×5.89")
Weight	290g (0.64 lb)