

DS-2CE16C5T-IT5 HD720P EXIR Bullet Camera

TURBO HD




EXIR



Key features

- 1.37 Megapixel high-performance CMOS
- Analog HD output, up to 720P resolution
- Low illumination
- True Day/Night
- OSD menu, 3D DNR, Smart IR
- EXIR technology, up to 80m IR distance
- IP66 weatherproof
- UTC function(Pelco C protocol)

Dimensions

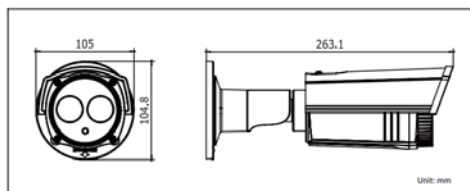

Accessories



Video balun
DS-1H18

Available models

DS-2CE16C5T-IT5

DS-2CE16C5T-IT5	
Camera	
Image Sensor	1.3 MP CMOS Image Sensor
Signal System	PAL/NTSC
Effective Pixels	1305(H)*1049(V)
Min. Illumination	0.001 Lux @(F1.2,AGC ON), 0 Lux with IR
Shutter speed	PAL: 1/50 s to 1/50,000 s NTSC: 1/60 s to 1/50,000 s
Lens	3.6mm (6mm, 8mm, 12mm, 16mm optional) Angle of View: 74.6°(3.6mm), 49°(6mm), 34.5°(8mm), 22.1°(12mm), 17.2°(16mm)
Lens Mount	M12
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	720p@50fps/720p@60fps
HD Video Output	1 Analog HD output
CVBS Output	1Vp-p Composite Output(75Ω/BNC)
S/N Ratio	More than 62dB
Menu	
Automatic Exposure	Globe AE/DWDR
AGC	Low/Middle/High/Off
Slow Shutter	Support
White Balance	Auto/Manual
D/N Mode	Color/BW/SMART IR
3D DNR	Low/Middle/High/Off
Motion Detection	Support, maximum 4 zones
Privacy Mask	On/Off, maximum 8 zones
UTC Function	Support
Language	English/Chinese
Function	Digital Wide Dynamic Range, 3D Digital Noise Reduction, Sharpness, Brightness, Digital Zoom, Mirror
General	
Working Temperature/ Humidity	-30 °C - 60 °C (-22 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC
Power Consumption	Max. 4W
Weather Proof Ratings	IP66
IR Range	Up to 80m
Communication	Up the coax(need UTC controller) Protocol: Pelco-C(Coaxitron)
Dimensions	105×104.8×263.1mm(4.13" ×4.13" ×10.36")
Weight	800 g (1.76 lbs)