

## DS-2CE56C2T-IT1/IT3 HD720P EXIR Turret Camera

# TURBO HD




## EXIR



### Key features

- 1.3 Megapixel high-performance CMOS
- Analog HD output, up to 720P resolution
- True Day/Night
- DNR, Smart IR
- EXIR technology, up to 20/40m IR distance
- IP66 weatherproof

### Dimensions

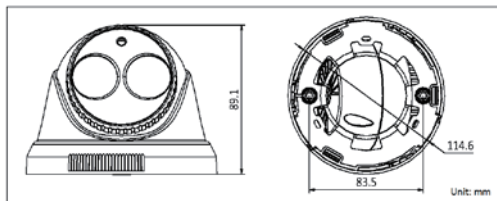

### Accessories



Indoor/outdoor wall mount  
DS-1272ZJ-110

Indoor wall mount  
DS-1258ZJ

Video balun  
DS-1H18

### Available models

DS-2CE56C2T-IT1  
DS-2CE56C2T-IT3

	DS-2CE56C2T-IT1		DS-2CE56C2T-IT3	
Camera				
Image Sensor	1 MP CMOS Image Sensor			
Effective Pixels	1280(H)*720(V)			
Min. Illumination	0.01 Lux @(F1.2,AGC ON), 0 Lux with IR			
Shutter Time	1/25(1/30) s to 1/50,000 s			
Lens	3.6mm (2.8mm, 6mm, 8mm optional)		3.6mm (2.8mm, 6mm, 8mm, 12mm, 16mm optional)	
	Angle of View: 78°(3.6mm), 97.3°(2.8mm), 51.2°(6mm), 36°(8mm)		Angle of View: 78°(3.6mm), 97.3°(2.8mm), 51.2°(6mm), 36°(8mm), 23°(12mm), 17.9°(16mm)	
Lens Mount	M12			
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°			
Day & Night	ICR			
Synchronization	Internal synchronization			
Video Frame Rate	720p@25fps/720p@30fps			
HD Video Output	1 Analog HD output			
CVBS Output	1Vp-p Composite Output(75Ω/BNC)			
S/N Ratio	More than 52dB			
General				
Working Temperature/ Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)			
Power Supply	12 VDC			
Power Consumption	Max. 3W		Max. 4W	
IR Range	Up to 20m		Up to 40m	
Dimensions	Φ 114.6 × 89.1mm(Φ 4.5" × 3.5")			
Weight	300 g (0.66 lb)			