


DS-2CE56C5T-(A)VPIR3

HD720P Outdoor Vandal Proof IR Dome Camera


TURBO HD

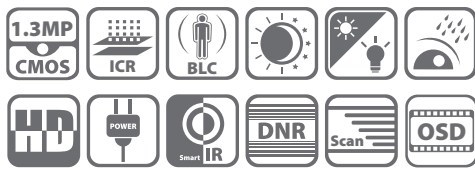

Key features

- 1.37 Megapixel high-performance CMOS
- Analog HD output, up to 720P resolution
- Low illumination
- 2.8 – 12mm vari-focal lens
- True Day/Night
- OSD menu, 3D DNR, Smart IR
- Up to 40m IR distance
- IP66 weatherproof & vandal proof
- UTC function(Pelco C protocol)
- 24V AC/ 12V DC (-A)

Dimensions

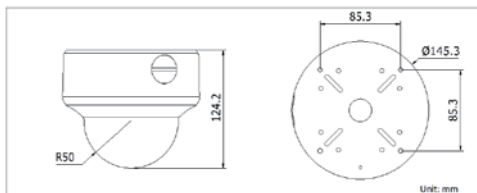

Accessories



Video balun
DS-1H18

Available models

DS-2CE56C5T-AVPIR3
DS-2CE56C5T-VPIR3

| DS-2CE56C5T-(A)VPIR3 | |
|-------------------------------|--|
| Camera | |
| Image Sensor | 1.3 MP CMOS Image Sensor |
| Signal System | PAL/NTSC |
| Effective Pixels | 1305(H)*1049(V) |
| Min. Illumination | 0.001 Lux @(F1.2,AGC ON), 0 Lux with IR |
| Shutter speed | PAL: 1/50 s to 1/50,000 s NTSC: 1/60 s to 1/50,000 s |
| Lens | 2.8-12mm @ F1.4 Angle of view: 92° - 29.3° |
| Lens Mount | φ14 |
| Angle Adjustment | Pan: 0 - 355°, Tilt: 0 - 80°, Rotation: ± 90° |
| Day & Night | ICR |
| Synchronization | Internal synchronization |
| Video Frame Rate | 720p @ 50fps/720p @ 60fps |
| HD Video Output | 1 Analog HD output |
| CVBS Output | 1Vp-p Composite Output(75Ω/BNC) |
| S/N Ratio | More than 62dB |
| Menu | |
| Automatic Exposure | Globe AE/DWDR |
| Lens Type | Auto Iris/ELC/ELC&ALC |
| AGC | Low/Middle/High/Off |
| Slow Shutter | Support |
| White Balance | Auto/Manual |
| D/N Mode | Color/BW/SMART IR |
| 3D DNR | Low/Middle/High h/Off |
| Motion Detection | Support, maximum 4 zones |
| Privacy Mask | On/Off, maximum 8 zones |
| UTC Function | Support |
| Language | English/Chinese |
| Function | Digital Wide Dynamic Range, 3D Digital Noise Reduction, Sharpness, Brightness, Digital Zoom, Mirror, Reset |
| General | |
| Working Temperature/ Humidity | -30 °C - 60 °C (-22 °F - 140 °F) Humidity 90% or less (non-condensing) |
| Power Supply | 12 VDC -A: 12 VDC, 24 VAC |
| Power Consumption | 12 VDC: Max. 3.5W 24 VAC: Max. 4.5W |
| Weather Proof Ratings | IP66 |
| IR Range | Up to 40m |
| Impact Protection | IEC60068-2-75 test, Eh, 20J; EN50102, up to IK10. |
| Communication | Up the coax(need UTC controller) Protocol: Pelco-C(Coaxitron) |
| Dimensions | Φ 145.3 × 124.2 mm (Φ 5.72" × 4.89") |
| Weight | 880 g (1.95 lbs) |