

### DS-2CE56D1T-(A)V FIR


### HD1080P Indoor Vari-focal IR Dome Camera



#### Key features

- HD1080P Video Output
- Adopt HDTV Technology
- True Day/Night, Smart IR
- 2.8 - 12mm vari-focal lens
- Up to 30m IR distance
- OSD menu controlled via UTC
- Dual voltage (DS-2CE56D1T-AV FIR)

#### Dimensions

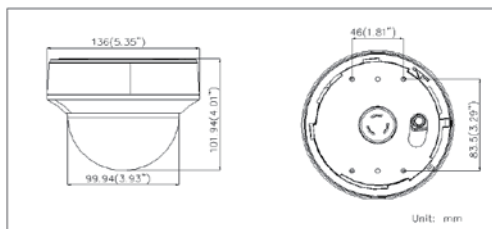

#### Accessories



Video balun  
DS-1H18

#### Available models

DS-2CE56D1T-V FIR  
DS-2CE56D1T-AV FIR

DS-2CE56D1T-(A)V FIR	
Camera	
Image Sensor	2 MP CMOS Image Sensor
Signal System	PAL / NTSC
Effective Pixels	1930(H)*1088(V)
Min. Illumination	0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR 0.014 Lux @ (F1.4, AGC ON), 0 Lux with IR
Shutter speed	1/25(1/30) s to 1/50,000 s
Lens	2.8-12mm @ F1.4 Angle of view: 105° 2' - 32.8°
Lens Mount	φ14
Angle Adjustment	Pan: 0 - 340°, Tilt: 0 - 90°, Rotation: 0 - 355°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	1080p @ 25fps/1080p @ 30fps
HD Video Output	1 Analog HD output
S / N Ratio	More than 52dB
Menu	
AGC	Support
D/N Mode	Color/ BW/ EXT
White Balance	Auto/ Manual
BLC	Support
Language	English/ Chinese
Function	Digital noise reduction, Mirror
General	
Working Temperature / Humidity	-20 °C – 45 °C (-4 °F – 113 °F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC ; -A: 12 VDC, 24 VAC
Power Consumption	Max. 4W
IR Range	Up to 30m
Communication	Up the coax Protocol: HIKVISION-C(Coaxitron)
Dimensions	Φ 136 × 101mm (Φ 5.35" × 3.98")
Weight	380g (0.84 lb)