


DS-2CE56C2T-IR HD720P IR Turret Camera


TURBO HD

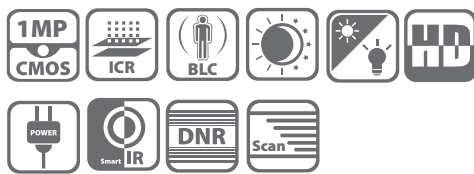

Key features

- HD720P Video Output
- Adopt HDTVI Technology
- True Day/Night
- DNR, Smart IR
- 20m IR distance
- IP66 weatherproof

Dimensions

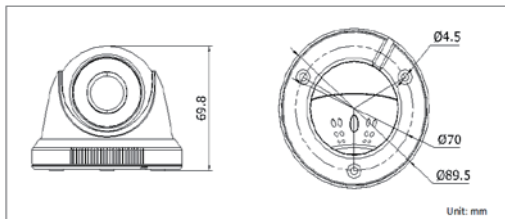

Accessories



Video balun
DS-1H18

Available models

DS-2CE56C2T-IR

DS-2CE56C2T-IR	
Camera	
Image Sensor	1 MP CMOS Image Sensor
Effective Pixels	1280(H)*720(V)
Min. Illumination	0.01 Lux @ (F1.2,AGC ON),0 Lux with IR
Shutter speed	1/25(1/30) s to 1/50,000 s
Lens	3.6mm (2.8mm, 6mm optional)
	Angle of View: 78°(3.6mm), 97.3°(2.8mm), 51.2°(6mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 75°, Rotation: 0 - 360°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	720p @25fps / 720p @30fps
HD Video Output	1 Analog HD output
S / N Ratio	More than 52dB
General	
Working Temperature / Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC
Power Consumption	Max. 4W
Weather Proof Ratings	IP66
IR Range	Up to 20m
Dimensions	Φ 89.5 × 69.8 mm (Φ 3.52" × 2.75")
Weight	260g (0.57 lb)